
M00000231
Pigtail set 12pcs, SM, LC/PC, white, 2m, Maunt

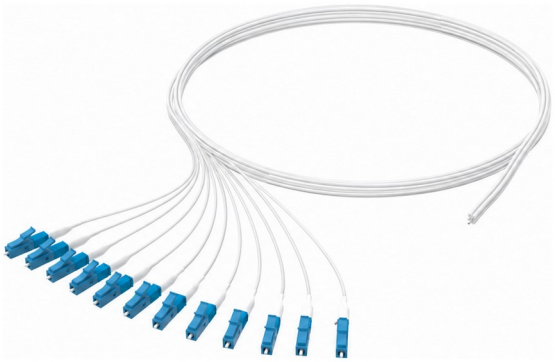

Description
Set of 12 pigtails with an LC/PC connector on one end and an unterminated fiber end on the other end. The pigtails are used to splice the fibers of a fiber optic cable, for example in splice closures, patch panels and enclosures. Each pigtail has a white LSOH buffer of 0.9 mm.

Brand
Maunt

Physical specifications

Number of pigtails	12
Buffer material	LSOH
Color	White
Diameter	0.9 mm
Length	2 m

Mechanical specifications

Tensile force	100 N

Optical specifications

Fiber type	Singlemode 9/125 µm, G.657A1
Connector	LC/PC, ceramic ferrule Ø1.25 mm, one-piece connector, snap-on
Insertion loss (max.)	0.25 dB
Return loss	≥ 45 dB

Environmental specifications

Operating temperature	-40°C to +85°C

Classification codes and standards

Standards	IEC 61300-3-4; IEC 61300-3-6; IEC 61300-3-34; IEC 61753-1; IEC 61754-20; TIA-604-10; ITU-T G.657
Fire safety	LSOH
Environmental/substance compliance	RoHS (2011/65/EU)