


MAUNT®

M00000348
ANT tool, black, Maunt

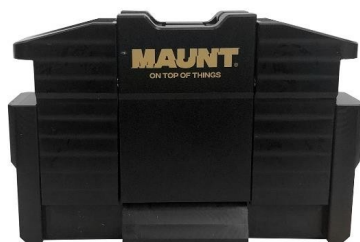

Description

This ANT tool is used to correctly attach an ANT splice protector around the completed fiber optic splice. The ANT tool is supplied with a set of ANT splice protectors in a resealable blister pack. The ANT splice protector contains a permanently elastic compound in which the unprotected splice is embedded, preventing damage to the splice.

Brand

Maunt

**Physical specifications**

Housing material	Plastic
Crimp jaw material	Aluminium
Housing colour	Black
Crimp jaw colour	Black
Dimensions (L x W x H)	84 x 22 x 55 mm
Weight	90 g

ANT splice protector (included)

Dimensions (L x W x H)	30 x 1.2 x 3.3 mm (width after crimping)
Suitable for fibers	Up to $\varnothing$ 250 μ m outer diameter
Packaging	Resealable blister pack

Environmental specifications

Operating temperature (ANT splice protector)	-40°C to +70°C
Storage temperature (ANT splice protector)	-25°C to +55°C
Relative humidity (ANT splice protector)	Max. 95%

Classification codes and standards

Standards (ANT splice protector)	TS 0338/96 Deutsche Telekom (T-Com)
----------------------------------	-------------------------------------